
IF IN DOUBT ASK.

	,
С)
_	,
É	5
_	í
	_
4	2
	2
_	•
1	1
_	,
4	'
۹	'
é	
3	3
2	3
ī	5
•	•

\perp	Z		X	工		J	D	\Box	B	А	LETTER.
FIXING STUD.	DIL RETURN.	PUSH ROD & DIL RETURN.	WATER	CYLINDER BORE.	WATER	WATER	PUSH ROD.	FIXING STUD.	DIL. FRONT = FEED. REAR = RETURN.	WATER	USED FOR.

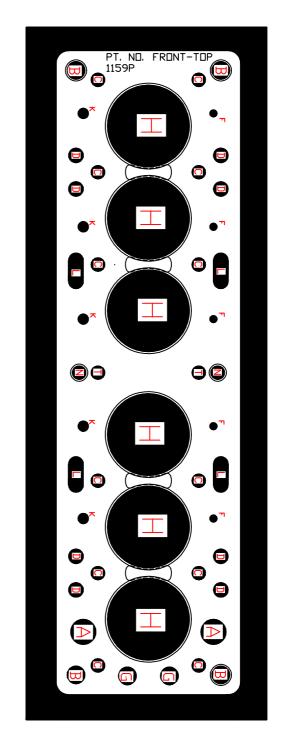

VIEW OF GASKET 1159P.
FOR IDENTIFICATION PURPOSES ONLY.

THIS DRAWING IS PART OF A SET OF 4 WHICH COVERS ALL 6 CYLINDER HEAD GASKETS, FOR THE OTHER RELEVENT DETAILS REFERE TO 6E259M SHEETS 1,2,3.

© 2014. RILEY REGISTER SPARES LTD.	SSI	5		
	BY	Эſ		
	DATE	JG 3/10/14		
	CHANGE	SEE SHEET 1.		
>07000	APR	ą		
DRAWN DEPENDE FORM E) GEOMETF APPLIED				

	SPARES LTD.	בי ארטוטורא		CU14.		
	APPLIED.	GEOMETRIC TOLERANCE IS	DEPENDENCY OF SIZE &	DT 0175 ADT 1/175	DRAWN TO BS 308. LIMITS	
INCHES	ALL DIMENSIONS ARE IN		I LILEKANCED ', COLO	+11 - 12 +/- 0.010 T	INSPECIFIED	
SIZE ON CAD.	ANGLE	PROJECTION 3RD	G. PARKER.	עםםםת/כח	J.H.G. 3/	±73€2.
F					3/10/14.	
			SEE SHEET 1.			MATERIAL:-
DE I HILS:	ロロスアロー	1388ET	HEAD		CYLINITED A	TITLE
ISSUE 5.	SHEET 5 OF 7		6E259M.			PART NO.